

KSYRIUM ELITE 09

USE: use only on a road bike. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.
Recommended maximum weight of the cyclist and his equipment: 100 kg.

WHEEL WEIGHTS Ø 700 WITHOUT QUICK-RELEASE SKEWER

Front: 675 g
Rear M10: 890 g
Rear ED10: 875 g

WHEEL WEIGHTS Ø 650 WITHOUT QUICK-RELEASE SKEWER

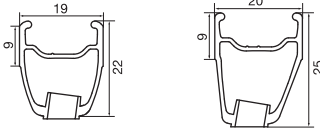


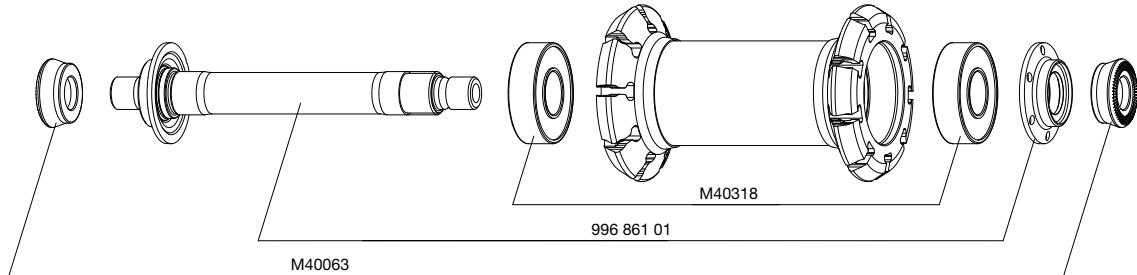
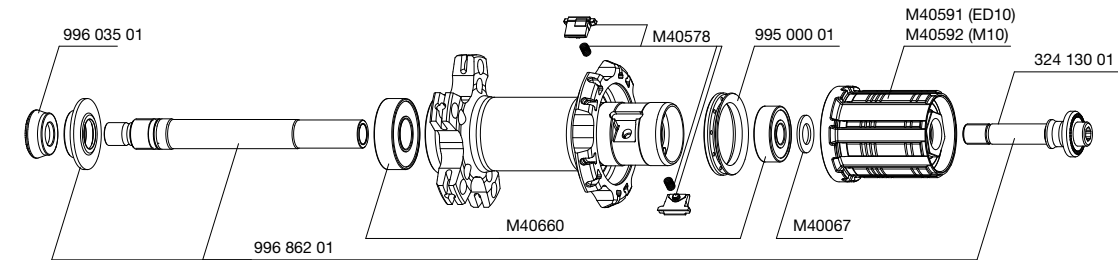
Front: 640 g
Rear M10: 805 g
Rear ED10: 790 g

BLACK WHEEL REFERENCES:

	Ø 700	Ø 650
Front:	996 155 10	996 165 10
Rear M10:	996 156 11	996 166 11
Rear ED10:	996 157 12	996 167 12
Pair M10:	996 158 14	996 168 14
Pair ED10:	996 159 14	996 169 14

SILVER WHEEL REFERENCES:

Front:	996 160 10
Rear M10:	996 161 11
Rear ED10:	996 162 12
Pair M10:	996 163 14
Pair ED10:	996 164 14

RIMS	REFERENCES:	Black:	Front: 996 855 10 Rear: 996 855 13	Silver:	Front: 996 863 10 Rear: 996 863 13	Ø 650 (Black):	Front: 996 869 10 Rear: 996 869 13	
			Ø VALVE HOLE  Ø: 6.5 mm Length.: ≥ 32 mm		RECOMMENDED TIRE WIDTH  Dimensions: Ø 700: ETRTO 622 x 15C Ø 650: ETRTO 571 x 15C Recommended tire width: 19 to 32 mm			
		When replacing the rear rim: 1. With the valve hole near you, the two raised indicator bumps must be to the left of the valve hole 2. The first spoke to the right of the valve hole is a driving spoke and should be inserted in the non-drive side of the hub						
HUBS	MAINTENANCE: Clean with a dry cloth or soap and water if necessary. Do not use a high-pressure washer.							
								
								
As the front hub is made up of three parts, maintenance operations (replacing the axle or bearings) must always be carried out on the assembled wheel (hub, rim and spokes assembled).								
WHEEL BUILDING	REFERENCES AND LENGTHS:	Black	Front	996 856 01, length 284 mm, (per 9, integrated nipples)				
			Rear drive side	996 857 01, length 276 mm, (per 10, integrated nipples)				
			Rear non-drive side	996 858 01, length 301 mm, (per 10, integrated nipples)				
		Silver	Front	996 864 01, length 284 mm, (per 9, integrated nipples)				
			Rear drive side	996 865 01, length 276 mm, (per 10, integrated nipples)				
			Rear non-drive side	996 866 01, length 301 mm, (per 10, integrated nipples)				
		Ø 650 Black	Front	996 870 01, length 259 mm, (per 9, integrated nipples)				
			Rear drive side	996 871 01, length 254 mm, (per 10, integrated nipples)				
			Rear non-drive side	996 872 01, length 280 mm, (per 10, integrated nipples)				
FEATURES:				LACING PATTERN:		TENSION:		
Black or silver stainless steel straight pull spokes with integrated, self-locking M7 screws.				Front: radial Rear: Isopulse		Front: 110 to 130 kg Rear drive side: 125 to 145 kg		
ACCESSORIES	WHEELS SUPPLIED WITH:			MAINTENANCE				
<ul style="list-style-type: none">• BR 301 front quick-release skewer 996 939 01• BR 301 rear quick-release skewer 996 940 01• ED10 12D locking ring M40640 (with rear wheel ED10)• Free play adjustment wrench M40123 (with rear wheel)• Spoke wrench M40494 (with rear wheel)• User guide				Replacing the front axle and bearings				See 2005 TM, page 20
				Replacing the rear axle				See 2007 TM, page 20
				Maintaining and replacing the free wheel mechanism				See 2003 TM, page 21
				Replacing the rear bearings				See 2004 TM, page 22
				Replacing a spoke				See 2008 TM, page 25
				Replacing the front rim				See 2008 TM, page 25
				Replacing the rear rim				See page 31
To consult this information quickly in a practical manner, refer to www.tech-mavic.com								